

CPVC Adapters

▶▶ ASTM F438 Sch. 40 Connection



Superior Design

Brass/copper fitting body shields CPVC socket for more durable connections

Unique design provides Full-Flow, with no restriction through the fitting

CPVC sockets comply with ASTM F438, and are designed for use with ASTM F441 Sch. 40 and Sch. 80 pipe

Better Performance

Transition from CPVC trunk lines to branch lines for individual units in multi-family projects

Engineered EPDM o-rings maintain a leak-proof seal between the CPVC socket and metal housing



Supply

Drainage


Support

Specialties

www.siouxchief.com

TAKE THE FIELD.



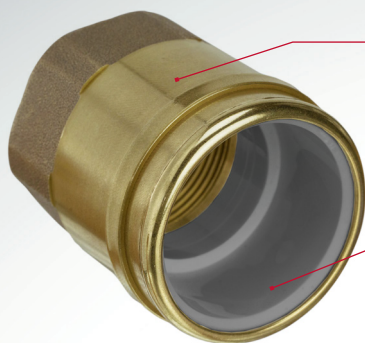

Brass is dezincification and SCC resistant.
Compliant with NSF-61 and California
No Lead Plumbing Law



CPVC F438 Sch. 40 socket is surrounded
by brass or copper sleeve for protection



Technical Specifications

Certifications:
FGG/BM/CZ
System Compatible

Max Temp:
180° F

Max Pressure:
250 PSIG



646-CG93



646-CG95



647-CG93



647-CG96

645XC93



645WGC95

643-C9311



Buying Information

ITEM NO.	DESCRIPTION	LENGTH	MIN. QTY.	CASE QTY.
MIP THREAD X CPVC SOCKET ADAPTERS				
646-CG92	1/2" CPVC Sch. 40 socket x 1/2" MIP thread adapter	1-9/16"	50	50
646-CG93	3/4" CPVC Sch. 40 socket x 3/4" MIP thread adapter	1-11/16"	50	50
646-CG94	1" CPVC Sch. 40 socket x 1" MIP thread adapter	2-1/4"	20	20
646-CG95	1-1/4" CPVC Sch. 40 socket x 1-1/4" MIP thread adapter	2-5/8"	10	10
646-CG96	1-1/2" CPVC Sch. 40 socket x 1-1/2" MIP thread adapter	2-7/8"	10	10
646-CG97	2" CPVC Sch. 40 socket x 2" MIP thread adapter	3-3/8"	10	10
FIP THREAD X CPVC SOCKET ADAPTERS				
647-CG92	1/2" CPVC Sch. 40 socket x 1/2" FIP thread adapter	1-9/16"	50	50
647-CG93	3/4" CPVC Sch. 40 socket x 3/4" FIP thread adapter	1-3/4"	50	50
647-CG94	1" CPVC Sch. 40 socket x 1" FIP thread adapter	2-1/4"	20	20
647-CG95	1-1/4" CPVC Sch. 40 socket x 1-1/4" FIP thread adapter	2-1/2"	10	10
647-CG96	1-1/2" CPVC Sch. 40 socket x 1-1/2" FIP thread adapter	2-15/16"	10	10
647-CG97	2" CPVC Sch. 40 socket x 2" FIP thread adapter	3-5/16"	10	10
F1807 PEX X CPVC SOCKET ADAPTERS				
645XC923	3/4" CPVC Sch. 40 socket x 1/2" F1807 PEX adapter - copper	4-1/4"	25	25
645XC93	3/4" CPVC Sch. 40 socket x 3/4" F1807 PEX adapter - copper	2-5/8"	50	50
645XC94	1" CPVC Sch. 40 socket x 1" F1807 PEX adapter - copper	2-1/2"	20	20
F1960 PEX X CPVC SOCKET ADAPTERS				
645WGC93	3/4" CPVC Sch. 40 socket x 3/4" F1960 PEX adapter - copper/brass	4-1/8"	50	50
645WGC94	1" CPVC Sch. 40 socket x 1" F1960 PEX adapter - copper/brass	4-7/16"	20	20
645WGC95	1-1/4" CPVC Sch. 40 socket x 1-1/4" F1960 PEX adapter - copper/brass	5-11/16"	10	10
STUB-OUT ELBOWS - CPVC SOCKET CONNECTION				
630-C9248	1/2" CPVC Sch. 40 socket x 1/2" stub out elbow - copper	4" trunk x 8" stub-out	50	50
630-C93612	3/4" CPVC Sch. 40 socket x 3/4" stub out elbow - copper	6" trunk x 12" stub-out	20	20
630-C941012	1" CPVC Sch. 40 socket x 1" stub out elbow - copper	10" trunk x 12" stub-out	25	25
MALE SWEAT X CPVC SOCKET ADAPTERS				
643-C9211	1/2" CPVC Sch. 40 socket x 1/2" copper M.SWT adapter	11"	25	25
643-C9311	3/4" CPVC Sch. 40 socket x 3/4" copper M.SWT adapter	11"	25	25
643-C9418	1" CPVC Sch. 40 socket x 1" copper M.SWT adapter	18"	25	25
MALE PRESS-FITTING X CPVC SOCKET ADAPTERS				
685-C95	1-1/4" CPVC Sch. 40 socket x 1-1/4" Press-Fit	5-3/4"	10	10

1: The CPVC resin used in this product has been tested and is monitored on an ongoing basis to assure its chemical compatibility with FlowGuard Gold®, BlazeMaster® and Corzan® piping systems