

OxBox™

Supply Access Box for Kitchens



Fast

Installs quickly with supply from above or below.

Valves are installed at rough, keeping them on test throughout the job. No drain down.

Reduced Liability

Fewer potential leaks. Don't cut into the lines at finish.

No wobbly stub outs, exposed tube/joints, inferior valves, or unsure bracketing.

Standardized

Installations are consistent – Clean, solid and professional.

Valves are replaceable with standard 5/8" OD supply stops.

Replaces variability in installation of stub out, bracket, escutcheon, and valve.



Supply

Drainage

Support

Specialties

www.siouxchief.com

TAKE THE FIELD.




Double Valve Flow @ 60 psi Static

Optional arresters for quick-closing dishwasher and icemaker valves.

All valves include nylon, hex test cap. Holds test and limits access by other trades to valve connection

Captured 5/8" compression thread valve base works with all common valves. Easily replaceable

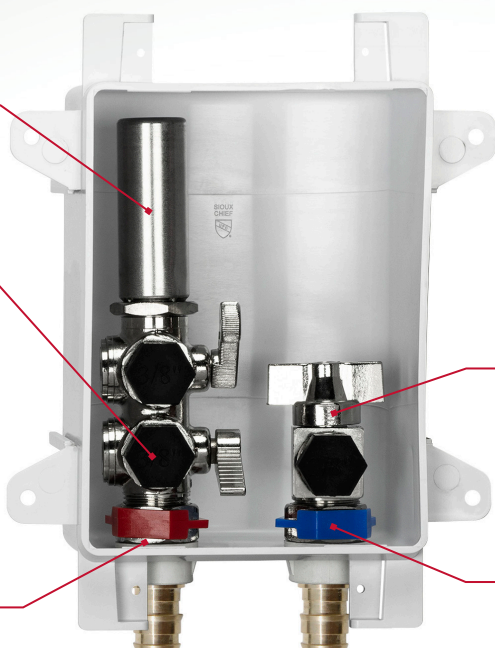

One-Fixture Water Demand (single outlet use)
5.1 GPM (top or bottom outlet)

Two-Fixture Water Demand (simultaneous use)
2.0 GPM (top) | 3.3 GPM (bottom)

Attractive, plated valves with easy-grip handles

Red and Blue clips provided with all valves. Attach to indicate hot/cold lines



696-G3011WR



696-G4021WR



696-1F

Buying Information

| 1/2" MALE CPVC ITEM NO. | 1/2" MIP/ESWT ITEM NO. | 1/2" MSWT* ITEM NO. | 1/2" F1960 PEX ITEM NO. | 1/2" F1807 PEX ITEM NO. | DESCRIPTION | MIN. QTY. | CASE QTY. |
|---|---|---------------------|-------------------------|-------------------------|--|-----------|-----------|
| OXBOX™ SUPPLY BOX with THREE Valve Outlets | | | | | | | |
| 696-G3011CR | 696-G3011MR | 696-G3011PR | 696-G3011WR | 696-G3011XR | TWO 3/8" Hot Outlets, Hot-Side Arrester ONE 3/8" Cold Outlet | 10 | 10 |
| 696-G3014CR | 696-G3014MR | 696-G3014PR | 696-G3014WR | 696-G3014XR | ONE 3/8" Hot Outlet ONE 3/8" Cold Outlet / ONE 1/4" Cold Outlet, Cold-Side Arrester | 10 | 10 |
| 696-G3021CR | 696-G3021MR | 696-G3021PR | 696-G3021WR | 696-G3021XR | TWO 3/8" Hot Outlets, Hot-Side Arrester ONE 3/8" Cold Outlet, Cold-Side Arrester | 10 | 10 |
| 696-G3024CR | 696-G3024MR | 696-G3024PR | 696-G3024WR | 696-G3024XR | ONE 3/8" Hot Outlet, Hot-Side Arrester ONE 3/8" Cold Outlet / ONE 1/4" Cold Outlet, Cold-Side Arrester | 10 | 10 |
| OXBOX™ SUPPLY BOX with FOUR Valve Outlets | | | | | | | |
| 696-G4021CR | 696-G4021MR | 696-G4021PR | 696-G4021WR | 696-G4021XR | TWO 3/8" Hot Outlets, Hot-Side Arrester TWO 3/8" Cold Outlets, Cold-Side Arrester | 10 | 10 |
| 696-G4024CR | 696-G4024MR | 696-G4024PR | 696-G4024WR | 696-G4024XR | TWO 3/8" Hot Outlets, Hot-Side Arrester ONE 3/8" Cold Outlet / ONE 1/4" Cold Outlet, Cold-Side Arrester | 10 | 10 |
| ACCESSORIES | | | | | | | |
| 696-1F | White OxBox frame - paintable ABS | | | | | 10 | 10 |
| 697-1F | Stainless steel OxBox frame | | | | | 10 | 10 |
| 696-SC1 | OxBox frame insert with hose knockout | | | | | 10 | 10 |
| 696-EX | OxBox frame extension | | | | | 10 | 10 |
| 305-RT | Grommet removal tool - use to remove valve from box | | | | | 10 | 10 |

* Male sweat connections are Press/Push-fit compatible