

PLASTIC P-TRAP - THREADED ADAPTER & ESCUTCHEON

» 230 SERIES

SPECIFICATION

Sioux Chief 230 Series P-Traps shall be installed where necessary in plumbing systems. Trap shall provide a liquid seal that prevents the back passage of gas without affecting the flow of sewage or wastewater through the system when installed in a properly vented DWV system. Trap shall include nuts, washers, trap adapter, and escutcheon. IAPMO Listed. Designed in accordance with ASTM F409-12.

MATERIALS

Tubular/Nuts: Chrome-plated ABS

Washers: Polyethylene, Buna-N rubber

Trap Adapter: PVC


Escutcheon: Chrome-plated ABS

DIMENSIONS

A: Overall length	11¼"
B: Wall bend length	7½"
C: Height	5"
D: Trap adapter length	1¾"
E: Width	1½"
F: Escutcheon width	3"
G: Escutcheon height	2¼"

Dimensions are approximate and provided for reference only

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

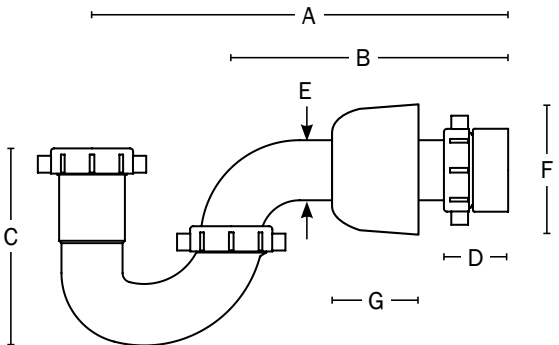

Item Number

230-0226301