

L-Bracket

» 521-210

Accessory

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

SPECIFICATION

Sioux Chief L-Bracket accessory for ZipStick™ or HangsTuff™ DWV extension hangers when necessary to extend length of hanger using 3/8" threaded rod or when necessary to secure extension hanger directly to a hard surface such as concrete or wood ceiling, joists or studs.

INSTALLATION

Long side of L-bracket should be attached to stem of ZipStick™ or HangsTuff™ extension hanger. Secure short side of L-bracket to joist, ceiling or threaded rod.

When attaching to concrete ceiling, use lead anchor sized for 3/8" threaded rod. Sammy screws for concrete or cast in place deck anchors are also acceptable methods for securing L-bracket to 3/8" threaded rod. Cut 3/8" threaded rod (not provided) to desired length then secure L-bracket with two washers and two hex nuts (not provided), placing bracket between washers and nuts.

When attaching L-bracket to wood joists, use #8 or #10 x 3/4" (length) screws. Minimum penetration into wood is 3/4". Once L-bracket is attached to structure, attach ZipStick™ or HangsTuff™ to the stem of the extension hanger with two screws (provided).



521-210

MATERIALS

L-bracket: 14-gauge, stainless steel


Screw: #8 X 1" Phillips pan-head, zinc-plated

SAFE WORKING LOAD

80 lbs

DIMENSIONS

A: Overall length	2.50
B: Overall height	1.25
C: Overall width	0.75
D: Hole spacing 1	.625
E: Hole diameter 1	0.38
F: Hole spacing 2	0.50
G: Hole diameter 2	0.20

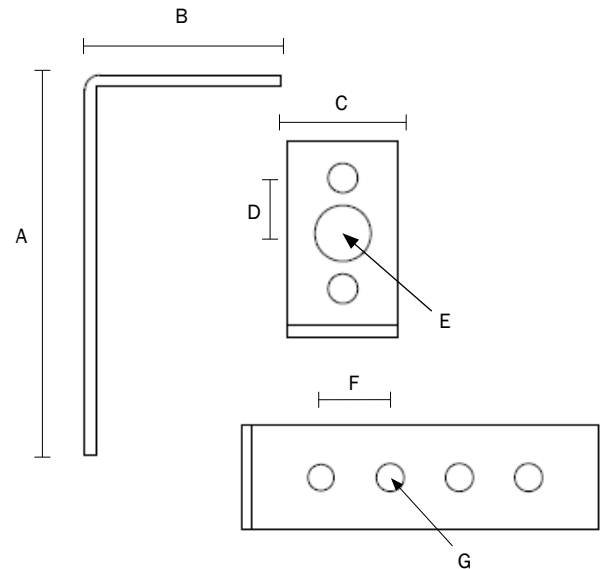

Made in USA

Item Number

521-210