

# DWV PIPE HANGER

» 553 SERIES

HangsTuff™

## SPECIFICATION

Sioux Chief 553 Series HangsTuff DWV pipe hanger shall be used where necessary to secure Sch. 40 DWV pipe in accordance with national or local code requirements. Hanger shall be 100% corrosion proof and UV resistant. Hanger shall be impact resistant to 0°F, and be able to withstand temperatures up to 140°F. Hanger shall include two, ring-shank nails, for a permanent installation. Hanger shall feature I-beam design for strength and rigidity with a locking-finger device designed to hold the pipe in place. Hanger shall be IAPMO certified.

## MATERIALS

**Hanger:** ABS, U.V. resistant, corrosion-proof, impact-resistant

**Nail:** 1-5/8" rust-resistant, plated, ring-shank

## SAFE WORKING LOAD

	1½"	2"	3"	4"
Cradle:	40 lbs.	50 lbs.	45 lbs.	40 lbs.
Inverted:	15 lbs.	15 lbs.	15 lbs.	15 lbs.

## INSTALLATION

Remove nails and insert into nail holes to secure hanger to joist. Lay tube on top of cradle then push down to snap pipe securely with locking finger. Hanger may be inverted when necessary. Stem may be shortened if necessary.


## DIMENSIONS

	1½"	2"	3"	4"
<b>A:</b> Top to pipe center	8-5/8"	8-15/16"	9-7/16"	9-15/16"
<b>B:</b> Overall length	10"	10-1/2"	11-3/4"	12-3/8"
<b>C:</b> Stem length	7-1/2"	7-1/2"	7-1/2"	7-1/2"
<b>D:</b> Nailways O/C	1"	1"	1"	1"

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____



553-8W

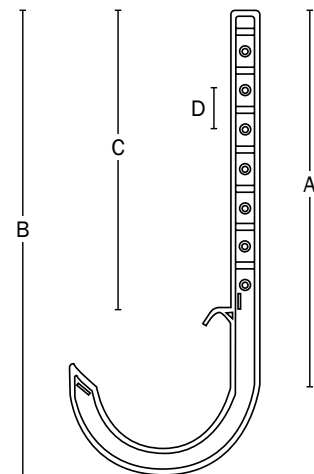

Except for 553-830W

Create Item Number

**553-A**

e.g. **533-8W:** HangsTuff 3" Sch. 40 DWV pipe hanger

### SIZE A

**6W** = 1-1/2" Sch. 40

**7W** = 2" Sch. 40

**8W** = 3" Sch. 40

**830W** = 3" Sch. 30

**9W** = 4" Sch. 40