

ISOLATING FELT

» 575-100Q

PipeDown™ Pipe Wrap Felt

SPECIFICATION

Sioux Chief self-adhesive isolating felt eliminates contact of dissimilar metals and provides minimal noise reduction caused by thermal expansion in water supply lines on residential or commercial applications. Adhesive glue shall be CPVC compatible. Pipe wrap shall be certified by UPC/IAPMO.

INSTALLATION

1. Cut felt to desired length.
2. Remove paper strip to expose adhesive.
3. Stick adhesive side to pipe and wrap around pipe. Double wrap for thicker barrier, if necessary.
4. Secure pipe in clevis hanger, strut clamp or other clamp or hanger.

MATERIALS

White polyester fiber

MAX TEMPERATURE

260°F


DIMENSIONS

- A:** Length 100 ft.
B: Width 2¼"
C: Thickness ⅛"

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____



575-100Q

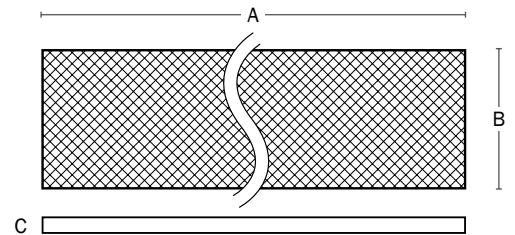

Made in China

Item Number

575-100Q