

ACOUSTICAL LINER FOR SUSPENDED HANGERS

» 575-101Q

PipeDown™ Hanger Channel Liner

SPECIFICATION

Sioux Chief's PipeDown™ Liner shall be used on plain steel or galvanized suspended hangers such as adjustable band hangers, adjustable swivel hangers, loop hangers, teardrops or clevis hangers when needed to isolate pipe and reduce noise transfer within the piping system. Liner shall be compatible with copper, PEX and CPVC and shall be certified by UPC/IAPMO.

INSTALLATION

1. Cut liner to desired length.
2. Install liner in saddle area of hanger to isolate supply line from galvanized hanger.
3. Install pipe in suspended hanger. Make sure spacing distance between hangers complies with National or Local code requirements.

MATERIALS

TPE shore 45A

TEMPERATURE RANGE

-30°F – 180°F

DIMENSIONS

- A: Outside dimension 0.858"
- B: Inside dimension 0.76"
- C: Height 0.232"


ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____



575-101Q



(intended use of channel liner)

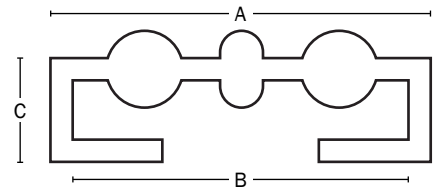

Made in Taiwan

Item Number

575-101Q