

BRASS BALL VALVE FOR F3347 PEX

▶▶ 648 SERIES

PowerPEX®

SPECIFICATION

Sioux Chief 648 series no-lead brass ball valves for ASTM F3347 PEX connection shall be used where necessary in water supply systems. Valves shall be designed with 1/4-Turn operation and blowout proof stem.

MATERIALS

Body: No-Lead Brass - DZR, SCC resistant¹

Seats: PTFE

Ball: Chrome-plated Brass

WORKING PRESSURE

400 WOG/PSI

Note: PEX connection specifications are limited to those called out in their respective ASTM standards for pipe and fittings.


DIMENSIONS

	1/2"	3/4"	1"
A: Overall length	3.25"	4.125"	4.0"

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____



648VG3FP

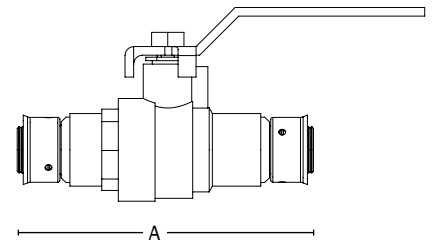

**LEAD
FREE
COMPLIANT**

Create Item Number

648VGA

e.g. 648VG2: 1/2" F3347 Full port ball valve

CONNECTION A

2FP = 1/2" F3347 PEX Full Port Valve

3FP = 3/4" F3347 PEX Full Port Valve

4FP = 1" F3347 PEX Full Port Valve

¹ Material is dezincification and SCC resistant, and compliant with NSF-61 Annex G (California No Lead Plumbing Law)