

STUB OUT KIT – ASTM F1960 GRIP

» 689 SERIES

RoughUp™

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

SPECIFICATION




Sioux Chief 689 series stub out assembly products shall be used where necessary in hot and cold water supply systems. Stub out assembly products shall allow for connection to the hot water and cold water lines through pre-formed copper terminations with appropriate ASTM pipe connections. Fitting ends shall be NSF listed. Sioux Chief stub out kits shall come with the proper bracketing to support the wall penetration terminations. Bracketing shall be Sioux Chief StrongArm™ series supports.

MATERIALS

- Copper:** Type L
- Bracket:** galvanized steel
- Bracket support:** ABS
- Screws:** #8x1" wood screw
- Inlet:** brass
- Nominal outlet connection size:** 1/2" (5/8")

DIMENSIONS

- A: 8"
- B: 4"
- C: 1/2" nom. (5/8" O.D.)
- D: 16" or 24"

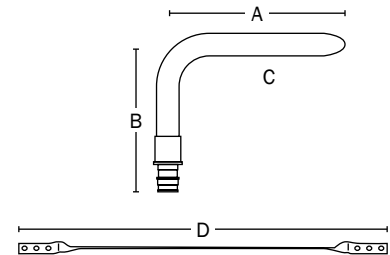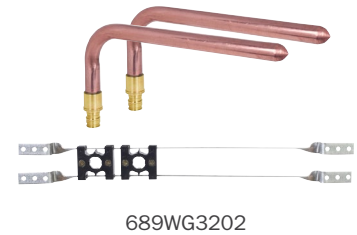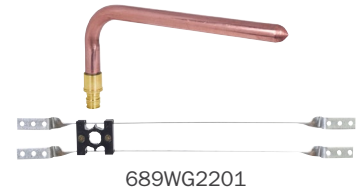

Create Item Number

689WGAB

e.g. **689WG2201:** 4" x 8" F1960 PEX end stub out and StrongArm support bracket for single 1/2" CTS stub out
 Additional options available at www.siouxchief.com

STUB OUT A

- 22** = (1): 1/2" 4x8
- 32** = (2): 1/2" 4x8
- 51** = (2): 3/4" 4x8

BRACKET OPTION B

- 01** = 16" StrongArm™, 1/2" w/ (1) LockBlock™
- 11** = 24" StrongArm, 1/2" w/ (1) LockBlock
- 02** = 16" StrongArm, 1/2" w/ (2) LockBlock
- 12** = 24" StrongArm, 1/2" w/ (2) LockBlock
- 03** = 16" StrongArm, 3/4" w/ (2) LockBlock
- 13** = 24" StrongArm, 3/4" w/ (2) LockBlock
- 91** = 16" StrongArm, 1/2" w/ (1) Shower WallNut LockBlock