

ASTM F1807 PEX WATER HEATER CONNECTOR KIT

» 694XG SERIES

HeatUp™

SPECIFICATION

Sioux Chief 694XG Series water heater connector kit shall be used where necessary in water distribution systems to connect PEX tubing to water heaters. ASTM F1807 PEX barb fitting ends are approved for use with ASTM F876 PEX tubing with copper crimp ring or stainless steel compression sleeve. Please contact Sioux Chief representative for specific product information within the Sioux Chief ASTM F1807 product offering.

MATERIALS

Copper: Type-L copper tube

Valve Body (where applicable): No-Lead Brass*

Swivel Nut: No-Lead brass* with EPDM gasket

WORKING LIMITS


80 PSI @ 200°F | 100 PSI @ 180°F | 160 PSI @ 73°F

INSTALLATION NOTES

Do NOT use pipe dope on FIP thread connections.
Always pressure test all joints before use.

* Material is compliant with NSF-61 Annex G and California No Lead Plumbing Law

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

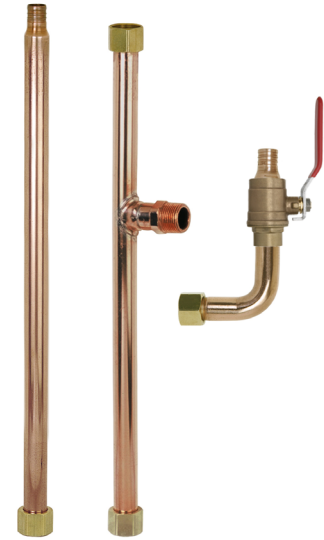

694XG32012091



Item Number Series

694XG A B C

e.g. **694XG32012091:** Kit including 3/4" PEX x 3/4" FIP swivel hot-side connector, 3/4" PEX x 3/4" FIP swivel elbow cold-side connector, no dielectric nipples, and 3/4" FIP swivel x 3/4" FIP swivel with 3/4" MIP branch connector for expansion tank

HOT-SIDE CONNECTOR A

- 06** = 3/4" PEX x 3/4" FIP swivel elbow (2½" x 4½")
- 07** = 3/4" PEX x 3/4" FIP swivel elbow (6" x 6")
- 08** = 3/4" PEX x 3/4" MIP elbow (4" x 6")
- 09** = 3/4" PEX x 3/4" FIP swivel S-bend (6" x 4½")
- 31** = 3/4" PEX x 3/4" FIP swivel (2" long)
- 32** = 3/4" PEX x 3/4" FIP swivel (18" long)
- 36** = 3/4" PEX x 1" FIP swivel (18" long)
- 46** = 3/4" PEX x 3/4" FIP swivel Flexible (18" long)
- 61** = 3/4" PEX x 3/4" MIP adapter
- 62** = 3/4" PEX x 3/4" MIP (18" long)

COLD-SIDE CONNECTOR B

- 01** = 3/4" PEX x 3/4" FIP swivel elbow with ball valve (2½" x 6")
- 21** = 3/4" PEX x 3/4" FIP swivel with ball valve (18" long)
- 25** = 3/4" PEX x 3/4" FIP swivel with 3/4" FIP branch and ball valve (18" long)
- 41** = 3/4" PEX x 3/4" FIP swivel Flexible with ball valve (18" long)
- 51** = 3/4" PEX x 3/4" MIP with ball valve (18" long)
- 15** = 3/4" PEX x 1" FIP swivel with ball valve (18" long)
- 22** = 3/4" PEX x 3/4" FIP swivel with 3/8" OD comp. pressure relief valve (18" long)
- 26** = 3/4" PEX x 3/4" FIP swivel with ball valve (6" long)
- 52** = 3/4" PEX x 3/4" MIP with ball valve (6" long)

EXPANSION TANK OPTION C

- 20** = No expansion tank option
- 2091** = 3/4" FIP swivel x 3/4" FIP swivel with 3/4" MIP branch (15" long)
- 2092** = 1" FIP swivel x 3/4" FIP swivel with 3/4" MIP branch (15" long)
- 2093** = 3/4" FIP swivel x 3/4" FIP swivel with 3/4" MIP branch (11" long)
- 2094** = 1" FIP swivel x 3/4" FIP swivel with 3/4" MIP branch (11" long)

Note: Not all option combinations are STOCK kits.
For non-stock kits, a minimum of 25 pcs is required
and extended lead times may apply.