

DRAIN ACCESS BOX

▶▶ 696 SERIES

OxBox™

SPECIFICATION

Sioux Chief 696-3 OxBox drain box shall be used where necessary in accessible plumbing applications. Box shall incorporate mounting tabs, and channel for use with common, galvanized, flat brackets. Box shall have an integral, knockout test cap on DWV socket. Test cap shall include a 1/2" (5/8" O.D.) nipple for optional test connection.

MATERIALS

ABS

MAX WORKING TEMPERATURE

150 °F

DIMENSIONS


A: Box inner width	4"
B: Overall box depth	3-1/2"
C: Box inner height	5-1/2"
D: Frame width ¹	5-1/2"
E: Frame height ¹	5-1/2"
F: DWV connection	2" Sch. 40 hub

¹ Optional frame

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____



696-3F

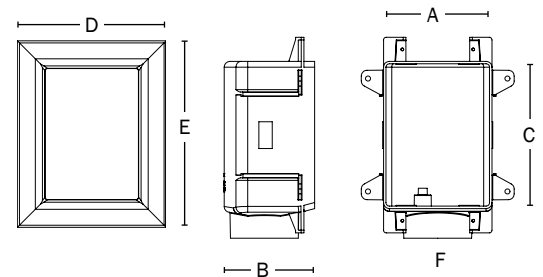

Create Item Number

696-A

e.g. **696-3F**: OxBox drain access box with finish frame

FRAME OPTION **A**

3 = Drain access box only

3F = Drain access box with frame

Accessories - Available Separately:

696-EX: Frame extension (for additional layers of drywall)

696-1F: Frame only

696-BC: Galvanized box clip

696-CF: Secondary drainage funnel

525-6918: Galvanized support bracket