

# GAS OUTLET BOX

▶▶ 696 SERIES

OxBox™

## SPECIFICATION

Sioux Chief 696 series OxBox gas outlet box shall be used where necessary in residential or commercial plumbing and gas supply systems. Box shall allow for mounting with supply line from top or bottom, on-stud or between studs. Valve shall be 1/4-turn operation with yellow handle. Metal support bracket shall install into top track of box for between-stud configuration.

## MATERIALS

**Valve:** Nickel-plated brass with powder-coated yellow aluminum handle  
Internal components: PTFE seats, chrome-plated brass ball

**Valve Adapter:** Brass<sup>1</sup>

**Adapter Locknut:** Zinc

**Valve plug:** Zinc-plated steel

**Box/Frame:** ABS

**Bracket:** Galvanized steel

## VALVE RATING

**Max Working Pressure:** 1/2 PSIG

**Max Testing Pressure:** 10 PSI

## APPROVED GASES

Natural gas, propane

## CERTIFICATIONS/APPROVALS

ANSI Z21.15, CSA

## DIMENSIONS


Model	696-1020GF	696-1021GF	696-1031GF
Adapter inlet x outlet	n/a	1/2" MIP x 1/2" FIP	3/4" MIP x 3/4" FIP
Valve inlet x outlet	1/2" FIP x 1/2" FIP	1/2" MIP x 1/2" FIP	3/4" MIP x 3/4" FIP
<b>A:</b> Frame width	5-7/8"		
<b>B:</b> Frame height	7-1/4"		
<b>C:</b> Box width	4"		
<b>D:</b> Box height	5-1/2"		
<b>E:</b> Box depth	3-1/2"		
Bracket length	18"		

1 Only models 696-G1021 and 696-G1031 include valve adapter

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____



696-1021GF

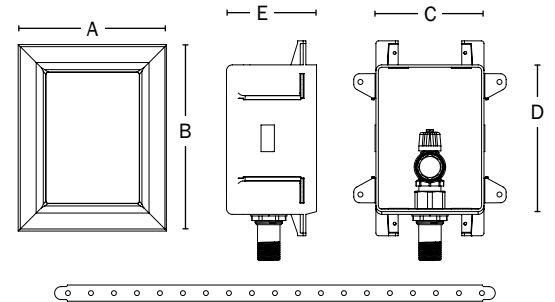

### Create Item Number

### 696-A

e.g. **696-1021GF:** Gas supply outlet box with brass adapter and valve - 1/2" MIP inlet x 1/2" FIP outlet

#### VALVE/ADAPTER CONNECTION A

**1020GF** = 1/2" FIP inlet x 1/2" FIP outlet valve<sup>2</sup>

**1021GF** = 1/2" MIP inlet (adapter) x 1/2" FIP outlet (valve)

**1031GF** = 3/4" MIP inlet (adapter) x 3/4" FIP outlet (valve)

#### Accessories - Available Separately:

696-1F: Single-box frame

696-EX: Frame extension

2 For use with CSST adapter - supplied by others