

ADJUSTABLE FLOOR DRAIN ROUGH-IN FIXTURE

» 832 SERIES

FinishLine™

SPECIFICATION

Sioux Chief 832 Series FinishLine adjustable on-grade floor drain rough-in fixture shall be used where necessary in drainage systems. Fixture shall include a Coring Sleeve to allow adjustment before the concrete pour. Coring Sleeve shall include a Coring Plug designed to be replaced with a Finish Fixture at finish. Fixture shall have a ductile iron base adapter with No-Hub connection. Trap primer port shall be threaded 1/2" FIP with plug. Designed in accordance with ASME A112.6.3-2001.

MATERIALS

Coring plug: high-impact polymer

Coring sleeve: Ductile iron

Base adapter: Ductile iron

DIMENSIONS


A: Connection size	3", 4" No-Hub
B: Overall diameter	6-7/8"
C: Base adapter height ¹	4-1/2"
D: Pre-pour adjustable height ¹	5-3/8" – 6-5/8"
Trap primer port	1/2" FIP thread, plugged

1 add 5/16" for Push-Joint connection

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____



832-4DF

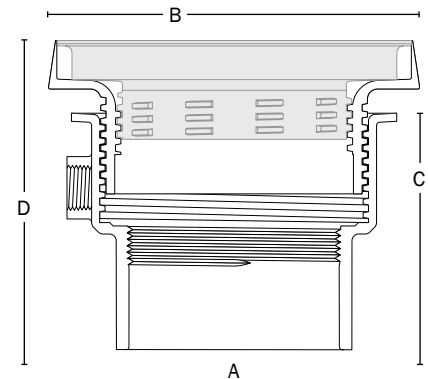

Create Item Number

832-A

e.g. **832-3DF:** FinishLine adjustable on-grade floor drain rough-in fixture with 3" No-Hub connection

CONNECTION SIZE A

3DF = 3" No-Hub

63DF = 3" Push-Joint

4DF = 4" No-Hub

64DF = 4" Push-Joint

Accessories - Available Separately:

832-P: Coring Plug wrench

832-W: Flexible locating bristles kit