

ADJUSTABLE CLEANOUT ROUGH-IN FIXTURE

» 834 SERIES

FinishLine™

SPECIFICATION

Sioux Chief 834 Series FinishLine adjustable floor cleanout rough-in fixture shall be used where necessary in drainage systems. Fixture shall include a Coring Sleeve to allow adjustment before the concrete pour. Coring Sleeve shall include a Coring Plug designed to be replaced with a Finish Fixture at finish. Fixture shall have a ductile iron base adapter with No-Hub connection and slotted polypropylene or brass cleanout plug, situated in base adapter. Designed in accordance with ASME A112.36.2M.

MATERIALS

Coring plug: high-impact polymer

Coring sleeve: Ductile iron

Cleanout plug: Polypropylene, brass

Base adapter: Ductile iron

DIMENSIONS


A: Connection size	3", 4"
B: Overall diameter	6-7/8"
C: Base adapter height ¹	4-1/2"
D: Pre-pour adjustable height ¹	5-3/8" – 6-5/8"
E: Cleanout plug	3-1/2" slotted

¹ add 5/16" for Push-Joint connection

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____



834-4DF

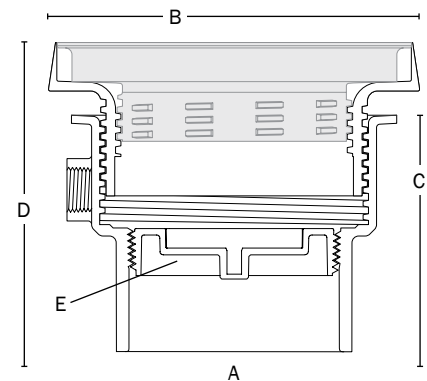

Create Item Number

834-AB

e.g. **834-4DFB**: FinishLine adjustable cleanout rough-in fixture with 4" No-Hub connection and brass plug

CONNECTION SIZE A

3DF = 3" No-Hub

63DF = 3" Push-Joint

4DF = 4" No-Hub

64DF = 4" Push-Joint

OPTIONS B

B = Brass cleanout plug
in lieu of polypro (standard)

Accessories - Available Separately:

832-P: Coring Plug / cleanout plug wrench

832-W: Flexible locating bristles kit