

ADJUSTABLE CLEANOUT ROUGH-IN FIXTURE

» 834 SERIES

FinishLine™

SPECIFICATION

Sioux Chief 834 Series FinishLine adjustable floor cleanout rough-in fixture shall be used where necessary in drainage systems. Fixture shall include a Coring Sleeve to allow adjustment before the concrete pour. Coring Sleeve shall include a Coring Plug designed to be replaced with a Finish Fixture at finish. Fixture shall have an ABS/PVC base adapter with Sch. 40 hub connection and slotted polypropylene or brass cleanout plug, situated in base adapter. Designed in accordance with ASME A112.36.2M.

MATERIALS

Coring plug: high-impact polymer

Coring sleeve: ABS

Cleanout plug: Polypropylene, brass

Base adapter: PVC, ABS


DIMENSIONS

A: Connection size	3", 4" Sch. 40 hub
B: Overall diameter	6-7/8"
C: Base adapter height	4-1/2"
D: Pre-pour adjustable height	5-3/8" – 6-5/8"
E: Cleanout plug	3-1/2" slotted

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____



834-4PF

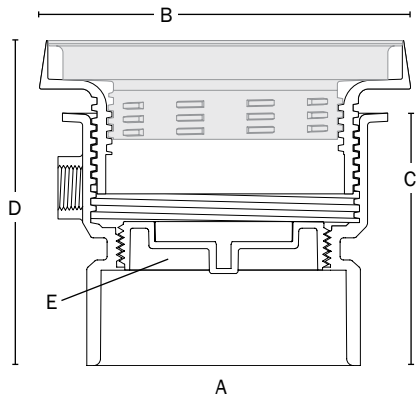

Create Item Number

834-ABC

e.g. **834-4PF**: FinishLine adjustable cleanout rough-in fixture with 4" Sch. 40 hub connection

CONNECTION SIZE **A**

3 = 3" Sch. 40 Hub

4 = 4" Sch. 40 Hub

CONNECTION TYPE **B**

AF = ABS base adapter

PF = PVC base adapter

OPTIONS **C**

B = Brass cleanout plug
in lieu of polypro (standard)

Accessories - Available Separately:

832-P: Coring Plug wrench

832-W: Flexible locating bristles kit