

ADJUSTABLE FLOOR DRAIN - ROUND TOP

»» 862 SERIES

SPECIFICATION

Sioux Chief 862 Series coated cast iron adjustable floor drain with anchor flange, weep holes, clamping collar, adjustable round nickel-bronze top with vandal-resistant/heel-resistant, secured grate, 1/2" NPT trap primer (plugged) and bottom outlet. Designed in accordance with ASME A112.6.3

General purpose floor drain for use in kitchens, showers, restrooms and other finished areas with foot traffic.

MATERIALS

Drain body: cast iron
Clamping collar: cast iron
Head/strainer: nickel-bronze


LOAD RATING

2,500 lbs.

DIMENSIONS

A: Connection size	2", 3", 4"				
B: Top diameter	5-1/4"	6"	7"	8"	9-1/2"
C: Strainer adjustment	1.0" - 2.2"	1.0" - 2.5"	1.3" - 2.6"	1.4" - 2.7"	1.6" - 2.8"
Strainer free-area	8.0 in ²	10.5 in ²	15.4 in ²	20.8 in ²	32.0 in ²

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

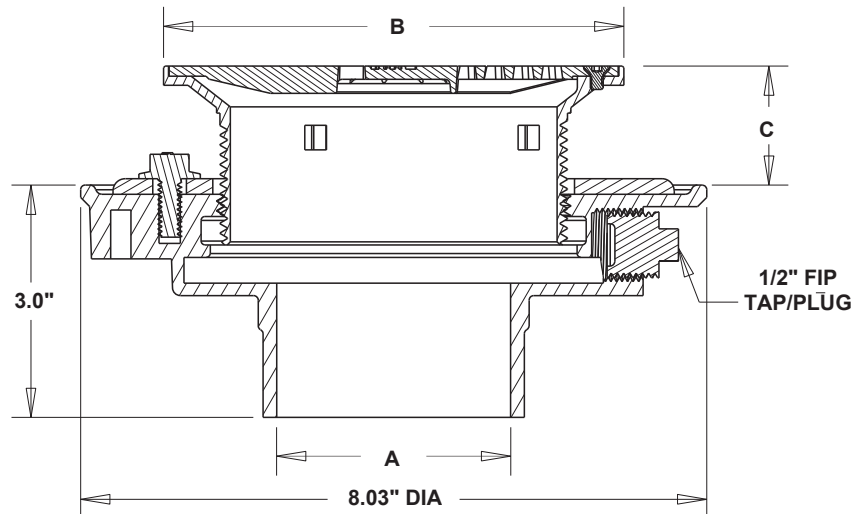

Create Item Number

862-ABCD

e.g. **862-236NRB**: Floor drain - 3" No-Hub connection, 6" round NB head/strainer with debris bucket

CONNECTION TYPE A

2 = No-Hub outlet
6 = Push-Joint outlet

CONNECTION SIZE B

2 = 2"
3 = 3"
4 = 4"

STRAINER DIAMETER C

5NR = 5-1/4" round
6NR = 6" round
7NR = 7" round
8NR = 8" round
10NR = 9-1/2" round

OPTIONS D

B = Debris bucket
E = Drain head extension adapter¹
9 = Side-outlet connection²

1: Cast iron - MIP x FIP thread | 2: For 3" and 4" No-Hub connection only