

ADJUSTABLE FLOOR DRAIN WITH SQUARE CAST IRON GRATE

» 862 SERIES

SPECIFICATION

Sioux Chief 862 Series coated cast iron adjustable floor drain with anchor flange, weep holes, clamping collar, adjustable square cast iron top with secured, heel-resistant and vandal-resistant grate, 1/2" NPT trap primer (plugged) and bottom outlet. Designed in accordance with ASME A112.6.3

General purpose floor drain for use in warehouses, mechanical rooms, parking garages, and other areas with heavy-duty traffic.

MATERIALS

Drain body: cast iron

Clamping collar: cast iron


Head/grate: cast iron

LOAD RATING

Extra Heavy-duty (7,500 - 10,000 lbs). Heel-resistant

DIMENSIONS

A: Connection size (No-Hub)	2", 3", 4"
B: Top diameter	9"
C: Strainer adjustment	1.55" - 2.55"
Strainer free-area	24.0 in ²

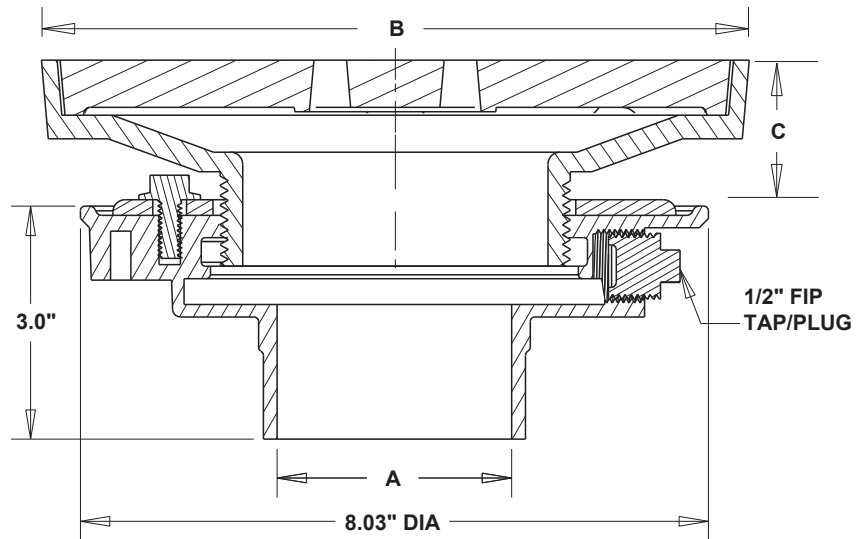

Create Item Number

862-ABC

e.g. **862-239IQB**: Floor drain - 3" No-Hub connection, square cast iron head/strainer with debris bucket

CONNECTION TYPE **A**

- 2** = No-Hub outlet
- 6** = Push-Joint outlet

CONNECTION SIZE **B**

- 29IQ** = 2"
- 39IQ** = 3"
- 49IQ** = 4"

OPTIONS **D**

- B** = Debris bucket
- E** = Drain head extension adapter¹
- 9** = Side-outlet connection²

1: Cast iron - MIP x FIP thread | 2: For 3" and 4" No-Hub connection only