

TRENCH DRAIN GRATE

» 865 SERIES

FastTrack™

SPECIFICATION

Sioux Chief 865 Series ductile iron slotted grate shall be used where necessary with FastTrack trench drain channels. Grate shall be approved for use in heavy duty applications and for pneumatic-tire forklift and commercial vehicle/equipment traffic at less than 15 mph. Grate shall have large open slots for increased flow into channel and fasten to anchors with screws.

ADA: No

Heel-Proof: No¹

Load Rating:

DIN EN 1433: Class D400²

ASME A112.6.3: Special Duty

MATERIALS

Grate: Ductile Iron

Screws: Nickel-plated brass

FREE-AREA

86.0 in²


DIMENSIONS

A: Length	36"
B: Width	6"
C: Thickness	0.75"
D: Cross Bar	5"
E: Slot opening	0.4375"

¹ Per ASME A112.6.3 requirements

² Grate can be installed with or without ductile iron grate frame (865-F), but grate frame **MUST** be used in all D400 load class applications.

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

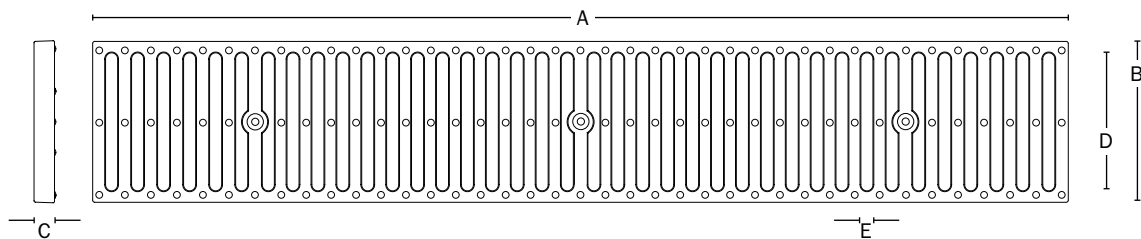

Item Number

865-GiS