

TRENCH DRAIN GRATE

» 865 SERIES

FastTrack™

SPECIFICATION

Sioux Chief 865 Series reinforced stainless steel slotted grating shall be used where necessary with FastTrack™ trench drain channels. Grating shall be corrosion resistant and approved for use in heavy-duty applications and parking areas with truck/vehicle traffic at less than 15 mph. Grating shall have large, open slots for increased flow capacity into channel and fasten to anchors with screws.

ADA: No

Heel-Resistant:¹ No

Load Rating:

DIN EN 1433: Class C250

ASME A112.6.3: Heavy Duty

MATERIALS

Grate: 304 Stainless steel - 14 gauge

Framework: 304 Stainless steel - cast

Screws: Nickel-plated brass

FREE AREA

60.0 in² per grate

DIMENSIONS

A: Length 36"

B: Width 6"


C: Thickness 3/4"

D: Slot length 5"

E: Slot opening 7/16"

¹ Per ASME A112.6.3 requirements

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

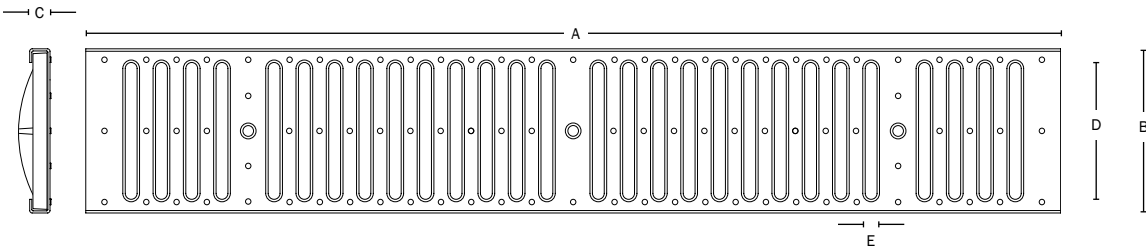

Item Number

865-GSSR

Reinforced stainless steel grate for trench drain