MAIN ROOF DRAIN

868 SERIES

ITEM # SUBMITTED_____

JOB NAME_____

LOCATION _____

ENGINEER_____

CONTRACTOR_____

PO#_____ TAG _____

SPECIFICATION

Sioux Chief 868 Series 15" diameter roof drain with No-Hub connection. Coated cast iron body with combination membrane flashing clamp/gravel guard and vandal-resistant, low profile dome strainer.
Designed in accordance with ASME A112.6.4

Used on any type of flat roofs. Low profile dome prevents debris from entering the drain line. The anchor flange and membrane clamp provide a secure grip of membrane and roof flashing materials.



MATERIALS


Dome strainer: cast iron, ABS, aluminum
Gravel guard: cast iron
Drain body: cast iron

DIMENSIONS

A:	Connection - No-Hub	3"	4"	6"	8"
B:	Body height	4.60"	4.60"	5.25"	5.25"

STRAINER FREE-AREA

105.3 in²

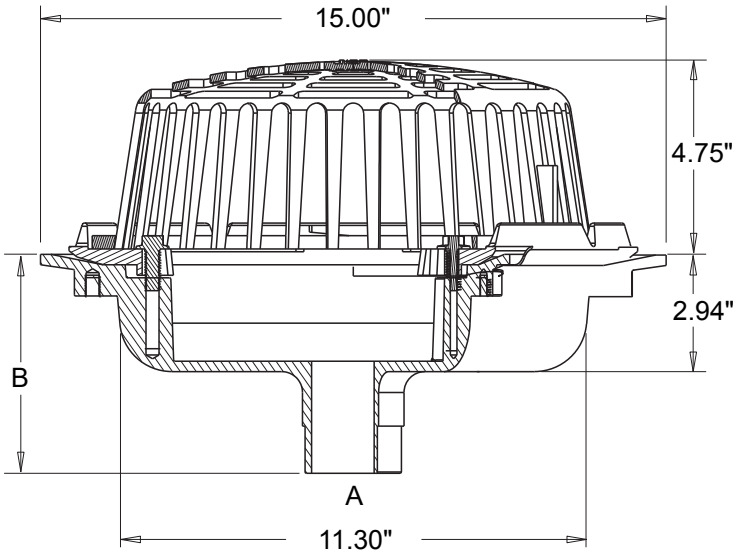

Create Item Number

868-ABC

e.g. 868-523BSC: Roof drain with 3" No-Hub connection, ABS dome, sump receiver and under-deck clamp kit

CONNECTION A

- ☐ **523** = 3" No-Hub
- ☐ **524** = 4" No-Hub
- ☐ **526** = 6" No-Hub
- ☐ **528** = 8" No-Hub

DOME STRAINER B

Cast iron dome is standard

- ☐ **B** = ABS dome
- ☐ **A** = Aluminum dome

OPTIONS C

- ☐ **9** = Side-outlet connection[1]
- ☐ **4** = 4" high SS perf. extension
- ☐ **P** = Top-mount sump receiver[3]
- ☐ **C** = Under-deck clamp kit
- ☐ **G** = 2" high SS perf. gravel guard
- ☐ **W** = 2" high external water dam
- ☐ **2** = 2" high SS perf. extension
- ☐ **D** = 6" high SS perf. dome cover[2]
- ☐ **S** = Sump receiver
- ☐ **E** = Adjustable extension
- ☐ **K** = 4" high SS perf. gravel guard

1 Not available for 6" or 8" roof drains | 2 With removable top | 3 Includes sump receiver plate and drain-to-plate attachment hardware