# MAIN ROOF DRAIN
## WITH ADJUSTABLE EXTENSION

### 868 SERIES

ITEM # SUBMITTED_____

JOB NAME_____

LOCATION _____

ENGINEER_____

CONTRACTOR_____

PO#_____ TAG _____

### SPECIFICATION
Sioux Chief 868 Series 15" diameter roof drain with No-Hub connection. Coated cast iron body with combination membrane flashing clamp/gravel guard, vandal-resistant, low profile dome strainer, and adjustable extension. Designed in accordance with ASME A112.6.4

Used on any type of flat roofs. Low profile dome prevents debris from entering the drain line. The anchor flange and membrane clamp provide a secure grip of membrane and roof flashing materials.




### MATERIALS
**Dome strainer:** cast iron, ABS, aluminum
**Gravel guard:** cast iron
**Drain body:** cast iron

### DIMENSIONS

| | | | | | |
|---|---|---|---|---|---|
| **A:** | Connection - No-Hub | 3" | 4" | 6" | 8" |
| **B:** | Body height | 4.60" | 4.60" | 5.25" | 5.25" |

### STRAINER FREE-AREA
105.3 in²

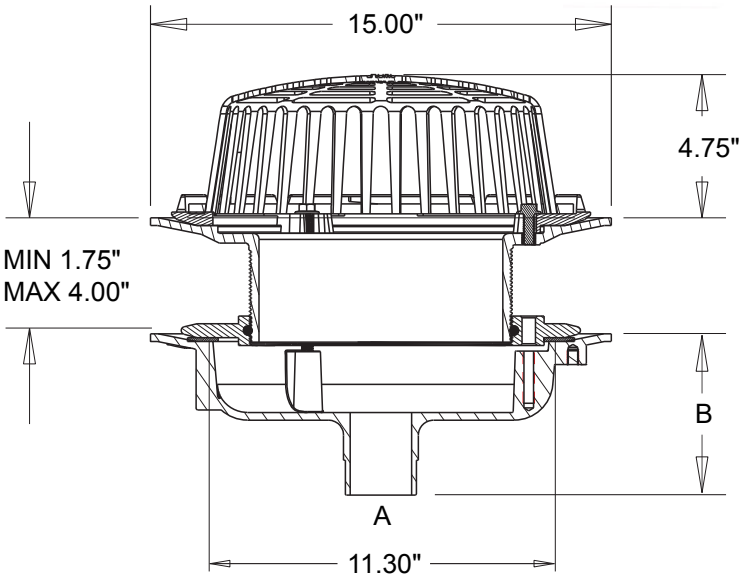


## Create Item Number

### 868-ABC

**e.g. 868-523BSCE:** Roof drain - 3" No-Hub connection, ABS dome, sump receiver, underdeck clamp, and adjustable extension

**CONNECTION A**
- ☐ **523** = 3" No-Hub
- ☐ **524** = 4" No-Hub
- ☐ **526** = 6" No-Hub
- ☐ **528** = 8" No-Hub

**DOME STRAINER B**
Cast iron dome is standard
- ☐ **B** = ABS dome
- ☐ **A** = Aluminum dome

**OPTIONS C**
- ☐ **9** = Side-outlet connection[1]
- ☐ **4** = 4" high SS perf. extension
- ☐ **P** = Top-mount sump receiver[3]
- ☐ **C** = Under-deck clamp kit
- ☐ **G** = 2" high SS perf. gravel guard
- ☐ **W** = 2" high external water dam
- ☐ **2** = 2" high SS perf. extension
- ☐ **D** = 6" high SS perf. dome cover[2]
- ☐ **S** = Sump receiver
- ☒ **E** = Adjustable extension
- ☐ **K** = 4" high SS perf. gravel guard

1 Not available for 6" or 8" roof drains | 2 With removable top | 3 Includes sump receiver plate and drain-to-plate attachment hardware