SIDE-OUTLET MAIN ROOF DRAIN

868 SERIES

ITEM # SUBMITTED_____

JOB NAME_____

LOCATION _____

ENGINEER_____

CONTRACTOR_____

PO#_____ TAG _____

SPECIFICATION

Sioux Chief 868 Series 15" diameter roof drain with side outlet. Coated cast iron body with combination membrane flashing clamp/gravel guard and vandal-resistant, low profile dome strainer.
Designed in accordance with ASME A112.6.4

Used on any type of flat roofs. Low profile dome prevents debris from entering the drain line. The anchor flange and membrane clamp provide a secure grip of membrane and roof flashing materials.




MATERIALS

Dome strainer: cast iron, ABS, aluminum
Gravel guard: cast iron
Drain body: cast iron

STRAINER FREE-AREA

105.3 in²

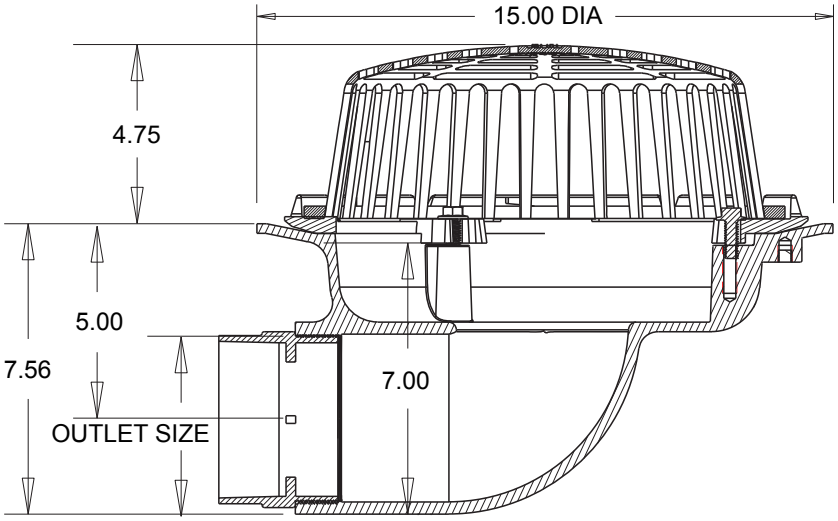

Create Item Number

868-ABC

e.g. 868-523B9SC: Roof drain with 3" No-Hub side outlet, ABS dome, sump receiver and underdeck clamp kit

CONNECTION A

- ☐ **523** = 3" No-Hub - side outlet
- ☐ **524** = 4" No-Hub - side outlet

DOME STRAINER B

- ☐ **9** = Cast iron dome
- ☐ **B9** = ABS dome
- ☐ **A9** = Aluminum dome

OPTIONS C

- ☐ **2** = 2" high SS perf. extension
- ☐ **D** = 6" high SS perf. dome cover[2]
- ☐ **S** = Sump receiver
- ☐ **E** = Adjustable extension
- ☐ **K** = 4" high SS perf. gravel guard
- ☐ **4** = 4" high SS perf. extension
- ☐ **P** = Top-mount sump receiver[3]
- ☐ **C** = Under-deck clamp kit
- ☐ **G** = 2" high SS perf. gravel guard
- ☐ **W** = 2" high external water dam

1 Not available for 6" or 8" roof drains | 2 With removable top | 3 Includes sump receiver plate and drain-to-plate attachment hardware