

CLOSET FLANGE

» 886 SERIES

SPECIFICATION

Sioux Chief 886 series closet flange shall be used where necessary in drainage systems. Closet Flange shall be fastened to floor and provide notches or slots for fastening closet bolts to flange ring. Closet flange shall have a 3" Sch. 40 hub connection which conforms to ASTM D2665 (PVC) or D2661 (ABS) and be designed for solvent weld connection inside 4" Sch. 40 pipe¹. Closet flange shall be UPC listed.

MATERIALS

PVC, ABS

INSTALLATION

Always fasten flange to floor, using screws in holes on both sides of the slot or notch that will be used for the closet bolts. Solvent weld over or inside¹ Sch. 40 ABS/PVC DWV pipe according to glue manufacturer's instructions. Test for leaks before use.

DIMENSIONS


A: Connection	3" Sch. 40 Hub ¹
B: Overall height	2.375"
C: Flange diameter	7.00"
D: Flange thickness	0.4375"
E: Hub depth	1.50"

¹ Connection is designed to fit inside most, but may not fit all 4" Sch. 40 PVC/ABS

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____



886-P

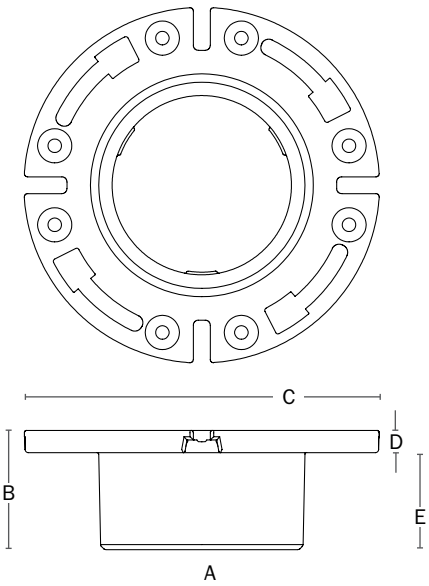

Item Number

886 SERIES CLOSET FLANGE

886-A = ABS one-piece closet flange

886-P = PVC one-piece closet flange