

CLOSET FLANGE

» 888 SERIES

SPECIFICATION

Sioux Chief 888 series closet flanges shall be installed where necessary in drainage systems. Closet flange shall be fastened to floor and have a full-swivel, corrosion-resistant stainless steel ring with slots for fastening closet bolts to flange ring. Flange shall be designed for solvent weld connection inside 3" Sch. 40 pipe. Inner diameter of flange outlet shall be at least 2½" and have smooth inner walls with no obstructions or ledges.

MATERIALS

Flange body: PVC, ABS

Flange ring: 430 Stainless steel

INSTALLATION

Always fasten flange to floor, using screws in holes on both sides of the slot or notch that will be used for the closet bolts. Solvent weld inside¹ Sch. 40 ABS/PVC DWV pipe according to glue manufacturer's instructions. Test for leaks before use.

DIMENSIONS


A: Connection	Inside 3" Sch. 40 Pipe ¹
B: Overall height	4.62"
C: Flange diameter	7.00"
D: Inlet diameter	4.00"
E: Screw centers	6.09"
F: Outlet ID	2.56"
G: Flange height	0.32"

¹ Connection is designed to fit inside most, but may not fit all 3" Sch. 40 PVC/ABS

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____



888-PM

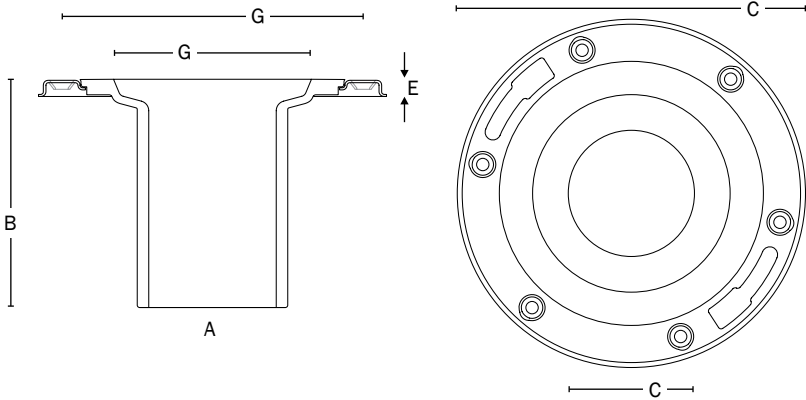

Item Number

888 SERIES CLOSET FLANGE

888-AM = ABS closet flange with swivel ring

888-PM = PVC closet flange with swivel ring