

TECHNICAL BULLETIN

» 664/665 SERIES

SUBJECT: PowerPEX® Tube in Open-Air Plenums

BULLETIN NO: SPLY-2402

DATE: February 2024


PAGE: 1 of 1

Installation in Open-Air Plenums

Sioux Chief's PowerPEX® tube is listed to ASTM E84¹ by Intertek.

It is approved for installation in an open-air plenum when installed according to our listing which requires the use of fiberglass insulation.

The insulation must also be listed to ASTM E84 with a flame spread index of less than 25 and a smoke developed index less than 50. The wall thickness of the insulation must be a minimum of 1/2"

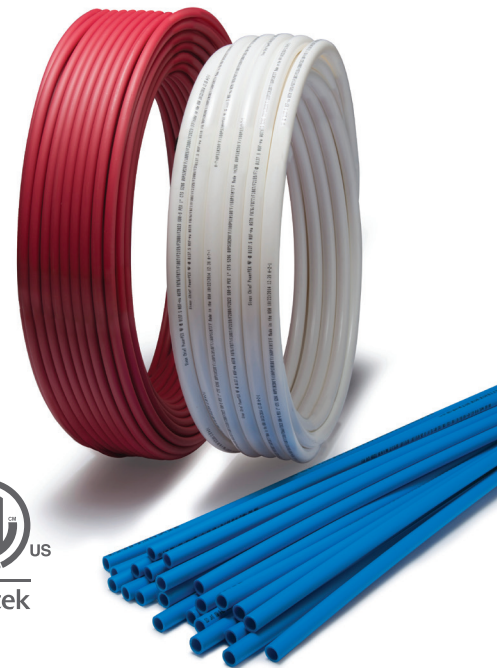

1) ASTM E84 & CAN/ULC S102: Standard Test Method for Surface Burning Characteristics of Building Materials

The information contained herein is believed to be reliable, but is subject to change without notice. Before use or installation, the user shall determine the suitability of the information for the intended purpose, and shall assume all risk and liability in connection therewith. With the exception of the information given above, use of any/all Sioux Chief product shall be in accordance with local plumbing codes, common practices, published installation instructions and legal requirements.