

METAL P-TRAP with CLEANOUT

240 SERIES

SPECIFICATION

Sioux Chief 240 Series P-Traps with cleanout shall be installed where necessary in plumbing systems. Trap shall provide a liquid seal that prevents the back passage of gas without affecting the flow of sewage or wastewater through the system when installed in a properly vented DWV system. Trap shall include a plugged cleanout port for trap access, escutcheon and die-cast or brass nuts. IAPMO Listed. Designed in accordance with ASME A112.18.2.

MATERIALS


Chrome-plated brass

DIMENSIONS

	-0452C04	-05B531C04	-0554C04	-0462C04
A: Length	10-3/8"	10-3/8"	10-1/8"	11-1/4"
B: Height	5"	5"	4-5/8"	5-3/8"
C: Diameter	1-1/4"	1-1/4"	1-1/4"	1-1/2"
D: Gauge	20ga	17ga	17ga	20ga
E: J-Bend	3"	3"	2-1/2"	3-3/8"
F: Wall tube	7-1/2"	7-1/2"	7-1/2"	7-1/2"
G: Trap seal	2-1/2"	2-1/2"	2"	3"

	-04631C04	-0463C04	-0464C04	-0563C04	-0467C04	-05B631C04	-0564C04	-0487C04
A: Length	11-1/4"	10-3/4"	10-3/4"	10-3/4"	10-3/4"	10-3/4"	10-3/4"	10-3/4"
B: Height	5-3/8"	5"	5"	5"	5"	5"	5"	5"
C: Diameter	1-1/2"	1-1/2"	1-1/2"	1-1/2"	1-1/2"	1-1/2"	1-1/2"	1-1/4"
D: Gauge	17ga	17ga	17ga	17ga	17ga	17ga	17ga	17ga
E: J-Bend	3-3/8"	2-7/8"	2-7/8"	2-7/8"	2-7/8"	2-7/8"	2-7/8"	2-7/8"
F: Wall tube	7-1/2"	7-1/8"	7-1/8"	7-1/8"	7-1/8"	7-1/8"	7-1/8"	7-7/8"
G: Trap seal	3"	2-1/2"	2-1/2"	2-1/2"	2-1/2"	2-1/2"	2-1/2"	2-1/2"

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

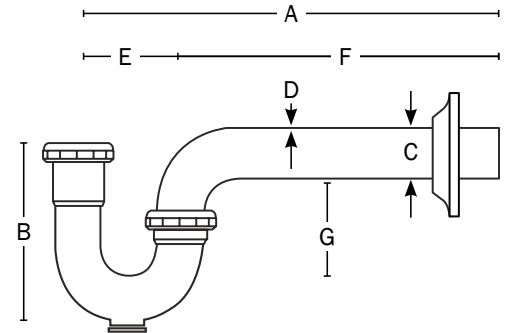

Create Item Number

240-ABCDE

e.g. 240-0453C04: 1-1/4" Chrome-plated, 17ga, brass P-trap with shallow escutcheon

ITEM A

- 04 = P-Trap with shallow escutcheon & cleanout
- 05 = P-Trap with deep bell escutcheon & cleanout
- 05B = P-Trap with deep box escutcheon & cleanout

SIZE B

- 5 = 1-1/4"
- 6 = 1-1/2"
- 8 = 1-1/2" x 1-1/4"

GAUGE C

- 2 = 20ga
- 3 = 17ga
- 4 = Cast brass
- 7 = Cast brass j-bend with 17ga wall tube

NUTS D

- C04 = zinc nuts
- 1C04 = brass nuts